



CURRENT SIGNAL SP-Series

APPLICATION

Warning of dangerous currents


The LED marine lantern SP-Series was developed for use in locks, barrages and drainage channels which create dangerous currents.

FEATURES

- available in the LED colors red, yellow, green and white
- suitable for continuous use in salty air and rough conditions due to the protection class IP65
- depending on local operating conditions at least 10 years of useful life
- versatile use and variation
- available in single to six-way arrangements
- for mounting on masts with an outer diameter of \varnothing 101 mm
- easy to use and maintain

OPTIONAL

- junction box and power supply
- different fastening options

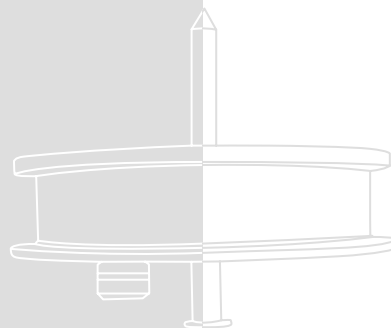

TECHNICAL SPECIFICATIONS

Supply voltage	12 V _{DC}
Power consumption	12 W
Operating temperature range	-20 °C – +55 °C
Relative humidity	100 %
Degree of protection	IP65 (according to DIN EN 40050)
Dimensions (L x B x H)	150 mm x 150 mm x 140 mm
Lens material	polycarbonate
Body material	AISI 316
Body color	RAL 9016 White
Mounting option	M 10
Sight distance	4,4 NM
Vertical divergence	15 °
Horizontal divergence	360 °

